



# > DIRTY WATER ELECTRIC PUMPS JET10S - JET11S - JET14S - JET15S

JET10S - JET14S single-phase motor  
JET11S - JET15S three-phase motor

### APPLICATION :

Conception allows to use the pump for clear water and slightly loaded water in construction sites, agriculture, irrigation, emptying of reservoirs, ponds, ...

### MOTOR'S CHARACTERISTICS :


Closed engine 50 Hz, cooled by ventilator  
Rotation speed : 2800 RPM  
Protection : IP54  
Isolation : Class F

### COMPONENTS :



**Body, cover and inspection door :** cast iron  
**Impeller :** cast iron  
**Motor shaft :** stainless steel  
**Wear disk :** stainless steel  
**Mechanical seal :** silicon carbide

### PUMP'S CHARACTERISTICS :

Self-priming pump cast with open impeller  
Suitable non return valve at suction  
Maximum suction depth : 6 meters  
Maximum liquid temperature : 70°C

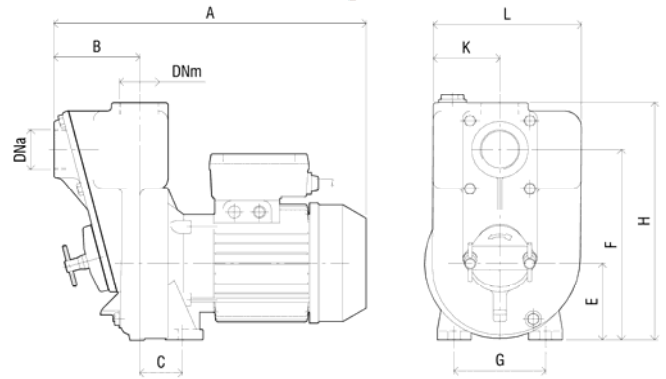

REFERENCE	A	B	C	E	F	G	H	K	L	DNa	DNM
JET10S/11S	370	103	51	92	230	110	285	80	180	1"1/2	1"1/2
JET14S/15S	415	120	55	106	232	132	300	87	185	2"	2"

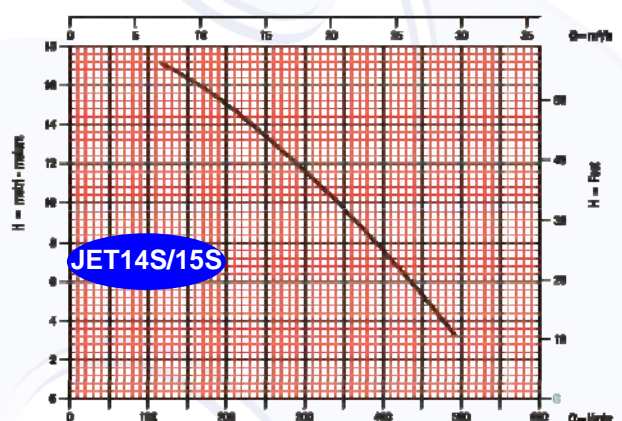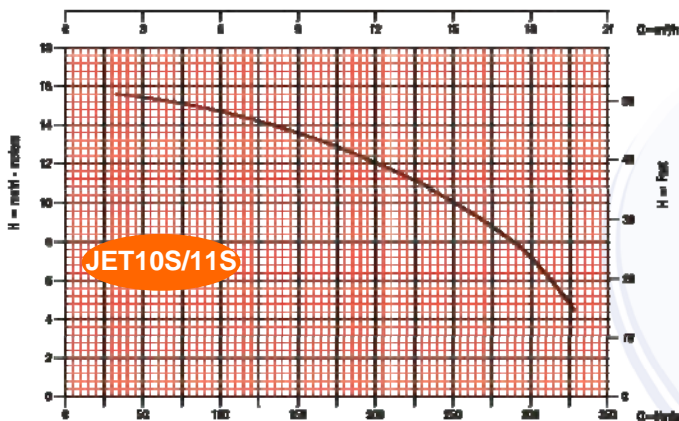

REFERENCE	TYPE	VOLTAGE in VOLT	INTENSITY in AMPERE	POWER in kW	MX SOLIDS DIAMETER	Ø INLET & OUTLET	WEIGHT in kg
JET10S	Single-phase	230	6,2	0,75	12 mm	1"1/2	21
JET11S	Three-phase	230 / 400	3 / 1,8	0,75	12 mm	1"1/2	21
JET14S	Single-phase	230	9	1,5	20 mm	2"	25
JET15S	Three-phase	230 / 400	7 / 4	1,5	20 mm	2"	25