



## > DISPENSER UNIT WITH AUTOMATIC HOSE REEL FOR DIESEL OIL PITSTOP

PITSTOP 2 pumps direct current 12 V

### APPLICATION :

Transfer of diesel oil in casual service of a maximal duration of 30 minutes

Industry, agriculture, publics works, excavation,...

Necessary to complete mobile or fixed tanks.

### PUMP CHARACTERISTICS :

By-pass integrated

Maximum inlet height :

- 2 meters
- 4 meters with a stand valve

Flow rate : 45 l/min

### MOTOR CHARACTERISTICS :

Motor with brooms 12 volts DC

### PUMP COMPONENTS :



Pump body : cast iron

Pallets support : steel

Pallets : acetal resin

### EQUIPMENT :

- automatic hose reel
- side safety guards
- adjustable arms with end-of-travel hose stop
- diesel hose, Ø 3/4", length 14 meters
- On/Off switch
- swivel
- automatic delivery nozzle
- 2 pumps 12 Volts DC
- sturdy metal supporting structure
- Starting cables with clips

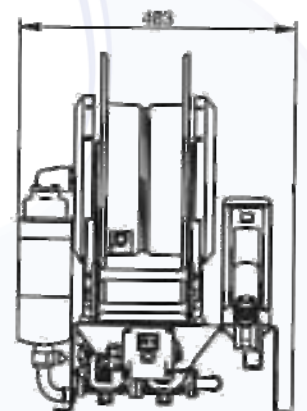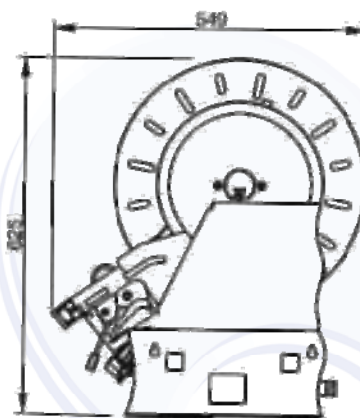

REFERENCE	POWER in kW	VOLTAGE in volt	CURRENT in ampere	Ø ORIFICE	FLOW RATE in m <sup>3</sup> /h	ROTATION SPEED	DURATION OF THE CYCLE in min	WEIGHT in kg
PITSTOP	0,4	DC 12 V	33	1 "	2,7	2900 rpm	30	45