



> ELECTRIC PUMP EMPTYING BARREL OF OIL - DIESEL FUEL F-JEV20 / F-JEV21 / F-JEV22 / F-JEV23

F-JEV20 single-phase motor 230 Volts
F-JEV21 three-phase motor 400 Volts
F-JEV22 single-phase motor 230 Volts
F-JEV213 three-phase motor 400 Volts

APPLICATION SECTOR :

Oil transfer from 10 to 500 Cst (mm²/s)
Use with diesel oil
Industry, agriculture, public works, ...

PUMP'S CHARACTERISTICS :


Integrated and adjustable by-pass
Maximum suction height : 5 meters
Maximum temperature of fluid : 60° C
Working ambient temperature : - 10°C to 60°C



EQUIPMENT :

Complete system emptying barrel equipped :

- Discharge : 4 meters tube with manual nozzle
- Suction : 1 meter plunger telescopic tube with quick fastening set on 2" barrel (integrated filter and check valve)

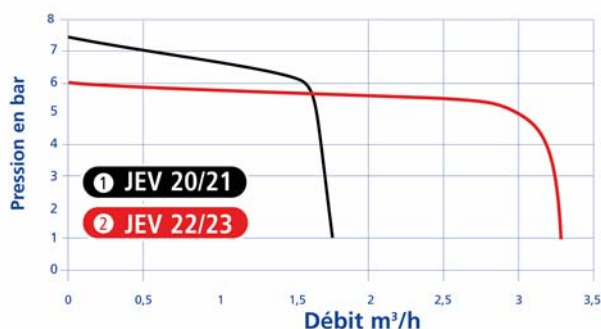

REFERENCE	TYPE	POWER	CURRENT	MAX HMT	MAX FLOW RATE	SPEED ROTATION	INLET / OUTLET Ø	WEIGHT
F-JEV20	Single-phase 230 V	0,75 kW	4,6 A	60 m	1,5 m³/h	1400 RPM	1"	18 kg
F-JEV21	Three-phase 400 V	0,75 kW	2,2 A	60 m	1,5 m³/h	1400 RPM	1"	16,5 kg
F-JEV22	Single-phase 230 V	1,6 kW	7,8 A	50 m	3 m³/h	1400 RPM	1"	21 kg
F-JEV23	Three-phase 400 V	2 kW	5 A	50 m	3 m³/h	1400 RPM	1"	21 kg

ADDITIONAL ACCESSORIES:

Metal filter 1"
300 microns
Ref. : TUF26



10 microns oil & diesel cartridge
Flow rate until 60 l/min + adaptor 1"
Ref. : TUF611

